

# FLEX-LOK™ Skirting System

## Quickly and Easily Eliminate Load Point Spillage


The Flex-Lok™ Skirt Clamp is designed with versatility to meet the needs of any conveyor loading site—even severe, heavy loading applications. The exclusive design features a unique clamp pin with a captive wedge that can be locked in any position 360° around the pin. When properly installed, Flex-Lok ensures the skirt rubber will not rub on the belt and cause premature wear or gouging marks.



**Optional** limited space Mini Flex-Lok clamps available



**Anti-vibration pin** ensures pin remains locked

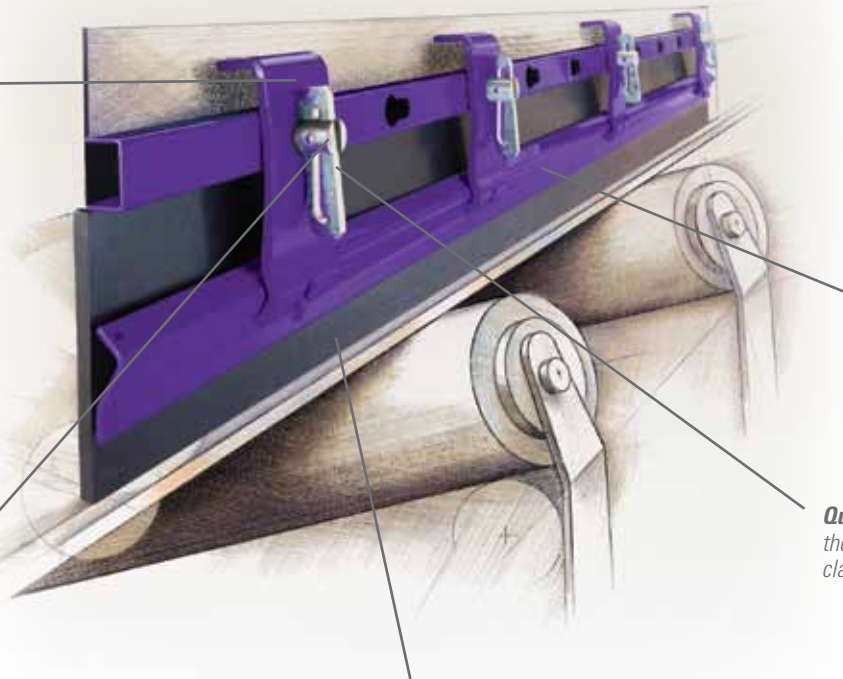

**No hassle installation** because skirt rubber restraining bar is held in place by clamp plates

**Quick adjustment** using the locking wedges on the clamp pins

**Rubber thickness** can vary from 5/16" to 1" (8-25mm) on Standard and 5/16" to 5/8" (8-16mm) on Mini

### Features and Benefits

- **No belt damage.** With correct installation, the skirt rubber will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe surface access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Lok Skirt Clamps are made of corrosion-protected components for tough duty. Replacement parts are available.

# FLEX-LOK™ Skirting System

## Ordering Information

<i>Flex-Lok Skirt Clamp*</i>		
Description	Ordering Number	Item Code
Skirt Clamp	FLSC-I	71052
Replacement Parts		
Clamp Runner - 6ft. (1.8M)	FL-RPI	71058
Clamp Plate	FL-PC-I	71057
Clamp Pin	FL-CP-I	71141
Restraining Bar - 6ft. (1.8M)	FL-RBI	71060

\* Skirt Rubber Thickness Range: 5/16" to 1" (8-25mm)

Shaded items are made to order.

Lead time: 5 working days

<i>Mini Flex-Lok Skirt Clamp*</i>		
Description	Ordering Number	Item Code
Mini Skirt Clamp	FLSCM-I	71055
Replacement Parts		
Clamp Runner - 6ft. (1.8M)	FL-RPI	71058
Mini Clamp Plate	FLM-PC	71140
Clamp Pin	FL-CP-I	71141
Restraining Bar - 6ft. (1.8M)	FL-RBI	71060


\* Skirt Rubber Thickness Range: 5/16" to 5/8" (8-16mm)

Shaded items are made to order.


Lead time: 5 working days

<i>Stainless Steel Flex-Lok Skirt Clamp</i>		
Description	Ordering Number	Item Code
SS Skirt Clamp	FLSC-ISS	75778
Replacement Parts		
SS Clamp Plate	FL-PC-ISS	71168
Clamp Pin	FL-CP-ISS	71164


316 Stainless on all parts



Standard



Mini

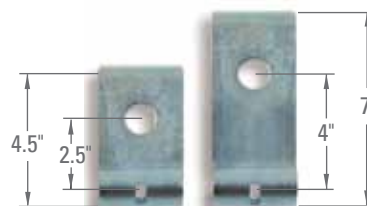

Mini

Standard

## Additional Information

Check out our other Skirting Systems, like the RMC1 or Flex-Seal.

RMC1



Flex-Seal



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 U.S.A.

Tel: (630)-971-0150 • Fax: (630)-971-1180 • E-mail: [info@flexco.com](mailto:info@flexco.com) • Web: [www.flexco.com](http://www.flexco.com)

Australia: 61-2-9680-3322 • China: 86-21-33528388 • England: 44-1274-600-942

Germany: 49-7428-9406-0 • Mexico: 52-55-5674-5326 • South Africa: 27-11-608-4180

©2011 Flexible Steel Lacing Company. 12/11 For Reorder: X2540

Authorized Distributor:

